


Snow blower

- City Ranger 2260

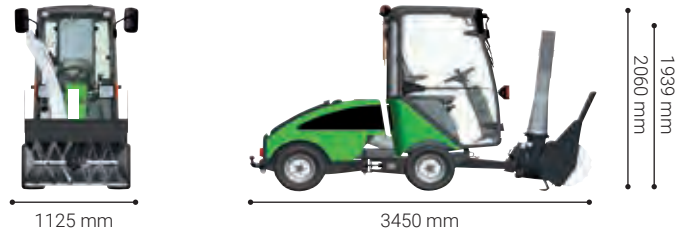

Standard equipment:

- Hydraulic and electrical adjustment of the chute** The horizontal direction of the chute is hydraulically adjusted via the joystick from inside the cabin. Vertical adjustment takes place via a button in the cabin.
- Blade** The snow blower has a replaceable blade.
- Skid** The 2 skids are height adjustable to ensure that the blade adjusts to surface variations.
- Safety feature** In case of clogging, the in-take of the machine is equipped with spring bolts to protect it from over-stress.
- Adjustable weight distribution** For optimum functionality as well as minimum wear of the attachment.

Extra equipment (options):

- Counterweight** When the snow blower works on its own - i.e., without the salt and sand spreader - counterweights MUST be fitted to ensure its stability.
- Anti-corrosion treatment** The anti-corrosion treatment will extend the life of the attachment.

Technical specifications

Dimensions		
Length	mm	3450
Width	mm	1125
Height with cabin / roll bar (ROPS)	mm	1939 / 2060
Storage dimensions		
Length	mm	1050
Width	mm	1125
Height	mm	1500
Weight		
Weight (snow blower)	kg	140
Performance		
Clearing width	mm	1100
Feed intake height	mm	600
Ground clearance below snow blower	mm	370
Auger diameter	mm	395
Blower diameter	mm	400
Auger revolutions per minute	rpm	1000
Noise emissions		
Sound power level LwA (2000/14/EC and DIN EN ISO 3744)	dB(A)	106
CE certified according to EU directive		

